OBC OMNIBEAM™ COMPACT FLUORESCENT LUMINAIRE

High Bay Prismatic Acrylic Open /Enclosed — *Surface Mount Optical Series*

With
EZ Connect™

APPLICATIONS

- Commercial / Retail applications where color rendering and instant-on characteristics are desired. For use in multipurpose, gymnasium, auditorium environments where multiple light levels and high quality of lighting are critical. For light industrial, assembly and general purpose applications where lighting control and consistent light output is required.

SPECIFICATION FEATURES

- UL 1598 Listed
  Suitable For Damp Locations
- cUL Listed to Canadian standards and codes
- 26" Open/ventilated or enclosed opticals with clear acrylic lens
- 40 deg, C. ambient rating standard
- UV stabilized injection molded prismatic acrylic reflector
- In-line EZ Connect™ plug-in adapter port allows for:
  - Quick, easy fixture installation and removal
  - Hook, Loop, cord & plug options
  - Plug-in modular wiring systems
  - Plug-in fuse kits
- Symmetrical, hexagonal heavy duty die-cast aluminum ballast housing with white polyester paint standard
- Standard threaded slide-in mounting adapter for easy installation
- Supplied with lamps (not installed)
- Shipped as components: Ballast, Optical and CFL Socket adapter reflector pan

ORDERING NUMBER LOGIC

OBC	W	48	F	0	F	V6	VA	11	
PRODUCT IDENT	COLOR	WATTAGE	LIGHT SOURCE	VOLTAGE	BALLAST TYPE	OPTICAL	PHOTOMETRY	MOUNTING STYLE	OPTIONS
XXX	X	XX	X	X	X	XX	XX	XX	XXX
OBC = Omnibeam Compact Fluo-rescent Luminaire	W=Polyester Powder White	See Table Below	F = Fluorescent 4100K Color Temp 4-Pin Biax Lamps Included	60Hz 0 = 120/208/240/277 Mulitvolt 1 = 120 2 = 208 3 = 240 4 = 277 *Single voltage selection for 120, 208, 240, 277 available only when ordering installed cord sets, (31, 33 and Modular Prewire), or Fusing. Otherwise order "0" for Multivolt 120/208/240/277 50Hz 6 = 220 R = 230 Y = 240	F = Standard Electronic	V6 = Open and Ventilated 26 in. Reflector E6 = Enclosed 26 in with clear flat acrylic lens Note: see Selection Table Below Note: Contact Factory for LEXAN ® polycarbonate	VA = Fixed	11 = Pendant Mounting / EZ Connect 13 = Provision for Slide-on Primary Electrical Disconnect. Order TWOBP Box (Thru Feed Capability) 14 = Provision for Slide-on Primary Electrical Disconnect. (Pendant and Thru Feed Capability) Order PED Box separately 15 = Prewire with EZ Loop, Cord and Plug Part or "Power Hook" (Order Receptacle/Hook Box Separately) (Not CSA/CUL) 31 = Prewire with EZ-Hook, 3-ft (0.9 Meters) #16/3 Cord, and Nema Plug 33 = Prewire with EZ-Loop, 3-ft (0.9 Meters) #16/3 Cord, and Nema Plug (Order locking receptacle hook box separately.) 92 = Individual ballast leads provided for switched light levels / individual ballast circuiting MODULAR PREWIRE 41 = ACS with 3-ft (0.9 meter) cord & EZ-Hook 69 = ACS with 6-ft (1.8 meter) cord & EZ-Hook 43 = ACS with 3-ft (0.9 meter) cord & EZ-Loop 70 = ACS with 6-ft (1.8 meter) cord & EZ-Loop PLUG-N-GO 51 = Plug-N-Go with 3 ft. (0.9 meter) Cord & Hook 71 = Plug-N-Go with 6 ft. (1.8meter) Cord & Hook 53 = Plug-N-Go with 3 ft. (0.9 meter) Cord & Loop 72 = Plug-N-Go with 6 ft. (1.8 meter) Cord & Loop Note: ACS = Flex 3+ Plug-N-Go = FSC Series	F = Fusing (Fuse Option not available with Multivolt) (Dual Fusing, 208 - 240 volt, not available with CUL listing) G = Secondary Wiring Access 7/8 in. dia knockout R = "Pre-wired for emergency battery back-up (sup-plied by others) with 7/8" OD cus-tomer access (120 or 277volt only)

FLUORESCENT WATTAGE ORDER INFORMATION

Omnibeam Open

V6 Optical - Open and Ventilated 26 Inch Reflector					
Wattage Order code	Wattage	Number of Lamps	SC	Photo Curve	*Lumen Multiplier
36	32	6	2.7	452884	.52
38	32	8	2.7	452884	.69
43	42	3	2.7	452884	.38
44	42	4	2.7	452884	.50
48	42	8	2.7	452884	1.00
73	70	3	2.9	452885	.61
74	70	4	2.9	452885	.81
76	70	6	2.9	452885	1.22

Omnibeam Enclosed

E6 Optical - Enclosed 26 Inch Reflector with Flat Acrylic Lens					
Wattage Order Code	Wattage	Number of Lamps	SC	Photo Curve	*Lumen Multiplier
36	32	6	2.6	452886	.52
38	32	8	2.6	452886	.69
43	42	3	2.6	452886	.38
44	42	4	2.6	452886	.50
48	42	8	2.6	452886	1.00
73	70	3	2.7	452887	.61
74	70	4	2.7	452887	.81
76	70	6	2.7	452887	1.22

* Multiply rated lumens from curve listed by "Lumen Multiplier" to provide accurate lumen value for corresponding lamp combination

OBC OMNIBEAM™ COMPACT FLUORESCENT LUMINAIRE

High Bay Prismatic Acrylic - Open/Enclosed — Surface Mount Optical Series

FIXTURE DIMENSIONS

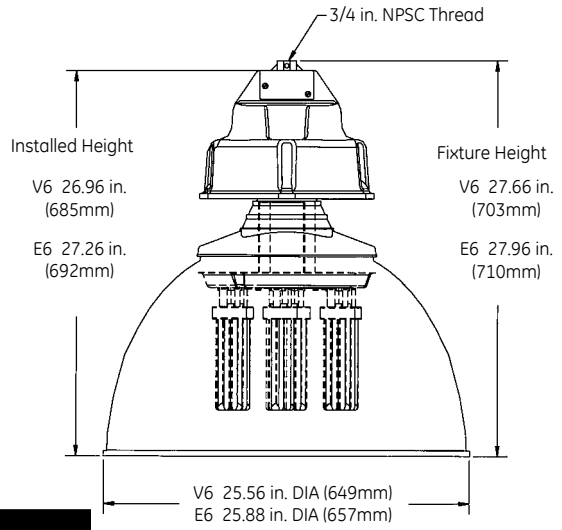

DATA

Approximate Net Weight	lbs	kgs
Total Fixture	35 - 40	16 - 18

BALLAST SELECTION TABLE

Single Lamp Wattage	Light Source	Ballast Type and Voltage							
		60 hz					50 hz		
		Multi	120	208	240	277	220	230	240
32	CFL	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
42	CFL	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
70	CFL	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

CFL = Compact Fluorescent
Compact Fluorescent provided with electronic ballast. 4-pin biax lamp included.

COMPACT FLUORESCENT BENEFITS:

- **Instant on** - Compact fluorescent lamps produce light instantly. This allows for the system to be turned off and on as required for optimized energy savings
- **Instant restrike** - Compact fluorescent lamps come on as soon as they are energized with no delayed restrike time. The need for emergency switched quartz restrike feature is eliminated.
- **Color Rendering** - White light with a color rendering index (CRI) of 82 provides for constant, uniform color over the life of the lamp. High CRI allows for brighter, clearer, more vibrant color recognition
- **Elimination of UV** - Compact fluorescent lamps eliminate the concerns of ultraviolet radiation.
- **Improved lumen maintenance** - Compact fluorescent lamps have less lumen depreciation at mean life than typical metal halide lamp types. This results in more consistent light output over the life of the lamp.
- **Low noise** - Compact fluorescent electronic ballasts used do not produce perceptible noise
- **Switchable Light Levels** - Multiple ballasts provide the opportunity to independently switch lamp pairs for multiple, stepped light levels. Optional wiring for circuited versions is available.
- **Emergency battery back-up -** Battery back-up allows for emergency lighting without the need for an auxiliary power back-up system
- **Multiple lamp back-up** - The use of multiple lamps insures that with the independent failure of a single lamp, the fixture continues to provide light until relamping occurs.
- **Safe Operation** - Compact fluorescent light sources do not require specific operation guidelines for safe operation.